


PERFORMANCE CURVES:

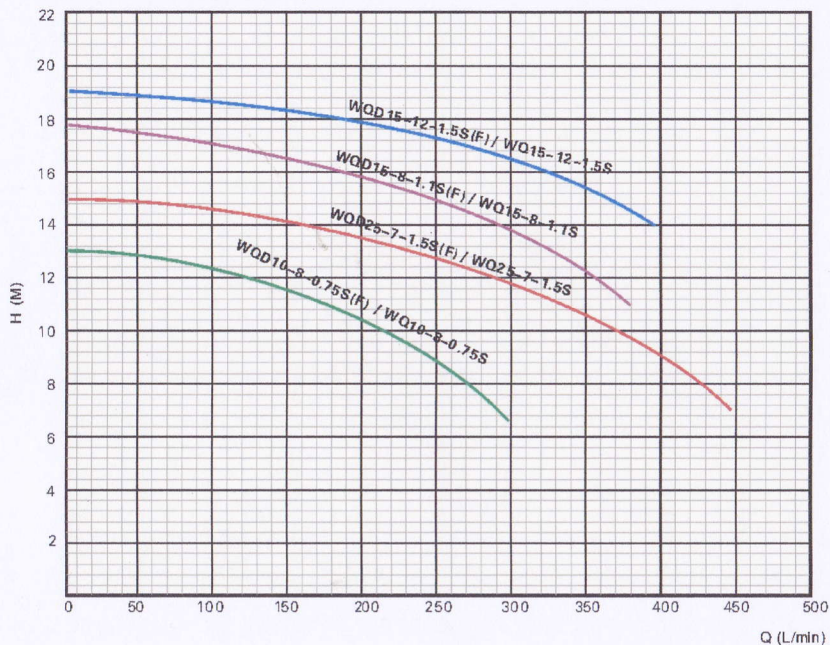

TECHNICAL PARAMETERS:

Model	Power (kW)	Outlet dia. (mm)	Voltage (V)	Frequency (Hz)	Max. Q (L/min)	Max. H (m)	G.W (kg)	Packing Dimension (cm)
WQD10-8-0.75S(F)	0.75	50	220	50	300	13	18	43.0X22.0X25.0
WQD15-8-1.1S(F)	1.1	50	220	50	367	18	19.4	44.0X22.0X25.0
WQD15-12-1.5S(F)	1.5	50	220	50	400	19	21.1	46.0X22.0X25.0
WQD25-7-1.5S(F)	1.5	65	220	50	450	15	21.2	46.0X22.0X25.0
WQ10-8-0.75S	0.75	50	380	50	300	13	18.3	43.0X22.0X25.0
WQ15-8-1.1S	1.1	50	380	50	367	18	19.7	44.0X22.0X25.0
WQ15-12-1.5S	1.5	50	380	50	400	19	21.6	46.0X22.0X25.0
WQ25-7-1.5S	1.5	65	380	50	450	15	21.7	46.0X22.0X25.0